# **REQUIRED MAINTENANCE**

### FILTERS:

(Procedures below must be performed regularly or as needed to protect dryer warranty status.)

### FILTER CLEANING:

The external filters of the **CHALLENGAIR 560**<sup>m</sup> Cage Dryer should be kept clean. If the filters become heavily coated with hair and/or dirt, it will reduce the air output of your dryer and can cause damage to the motors or cause the motors to overheat.

### \*Never operate the dryer without all filters in place.


### To clean filter:

- 1. Detach filters from both sides of dryer.
- 2. Filters are attached with hook and loop fasteners; pull to detach.
- 3. Vacuum or shake off dirt. Filters may also be rinsed with cool water if necessary. Let the filter dry completely before reinstalling on dryer.
- 4. Re-attach filters to dryer by pressing gently in the center of the filter.

### **Cleaning Dryer Interior:**

Hair and dust will accumulate inside the dryer. Please blow clean as needed using a Challengair forced air dryer or suitable high-pressure air outlet.

Any maintenance not explained in this manual should be performed by **Double K Industries** or an Authorized Service Center. Visit <u>www.doublekindustries.com</u> or call **Double K Industries** for the name of the Authorized Service Center nearest you. All warranty service must be performed by an Authorized Service Center (or **Double K Industries**) to protect your warranty status.

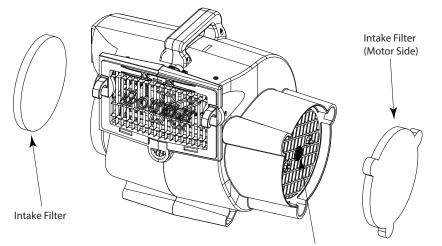

Hook & Loop Disc



CHALLENG**ATR<sup>®</sup> 560** Advanced Cage Dryer for Animals



**INSTRUCTION MANUAL** 

### PLEASE READ ALL INSTRUCTIONS AND SAFETY PRECAUTIONS BEFORE OPERATING PRODUCT

### SAVE FOR FUTURE REFERENCE; WARRANTY PERTINENT CONTENT.

# Product Specifications: Model - 560

Voltage: 115v Amperage: 16 Wattage: 1840 Air Volume: 750 CFM Voltage: 230v Amperage: 9.55 Wattage: 2197 Air Volume: 750 CFM

9711 Mason Avenue, Chatsworth, CA 91311 (818) 772-2887 • (800) 821-9449 • fax: (818) 886-0218 www.DoubleKIndustries.com • info@DoubleKIndustries.com

## **IMPORTANT SAFEGUARDS**


# WARNING: IMPORTANT SAFETY PRECAUTIONS! PLEASE READ COMPLETELY BEFORE USING PRODUCT!

When using electrical appliances, especially when children or animals are present, basic safety precautions should always be followed to reduce the risk of fire, electric shock and personal injury, including but not limited to the following:


# Remove the cardboard fan stabilizers and attach the filter folded in half under dryer handle to intake grill before operating dryer.

- 1. Do not leave dryer OR the animal unattended while product is in use.
- 2. Unplug unit when not in use.
- 3. Do not use extension cords with dryer.
- 4. Do not unplug unit by pulling on cord.
- 5. Do not expose dryer to rain or water.
- 6. Do not use or store dryer where it can fall or be pulled into tub or sink or standing water. If dryer falls into water... UNPLUG IT... Do not reach into the water!
- 7. Unplug unit before attempting any maintenance or service.
- 8. Do not put any object into dryer openings.
- 9. Keep loose clothing, jewelry and hair away from dryer openings.
- 10. Do not direct dryer air towards eyes or ears of people or pets.
- 11. Never use dryer if it has a damaged cord or plug, has been dropped, damaged or exposed to rain or water. Return to **Double K Industries** or an Authorized Service Center for service.
- 12. This product is for use on animals only.
- 13. Recommended operation by adults only. Use caution when working around children.
- 14. Use only attachments recommended by **Double K Industries**.
- 15. Do not block air intakes.
- 16. Do not operate without filters in place. Keep filters clean, as dirty filters limit air intake and may damage the motor or cause overheating.
- 17. Plug only into a properly grounded receptacle. Always make sure the amperage of the electrical outlet is sufficient for the amperage rating of the product. (See Product Specifications for amperage rating of this product).
- 18. Do not use product for anything other than its intended purpose.
- 19. Do not attempt to perform any service or maintenance not outlined in instruction manual.
- 20. Do not attempt any product modifications or alterations. Do not use, if any parts or switches are damaged. Send to an Authorized Service Center or **Double K Industries** for service.
- 21. When servicing, use only **Double K Industries** parts.


WARNING: DISCONNECT POWER SUPPLY BEFORE SERVICING AVERTISSMENT: COUPER L'ALIMENTATION AVANT L'ENTRETIEN ET LE DÉPANNAGE

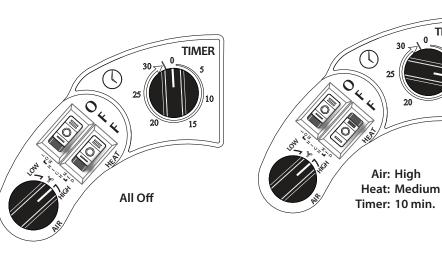

TIMER




TIMER



Air: Low

Timer: 10 min.

Heat: Low




### 2

7

# SAMPLE CONTROL CONFIGURATIONS

### 560 Cage Dryer Configurations

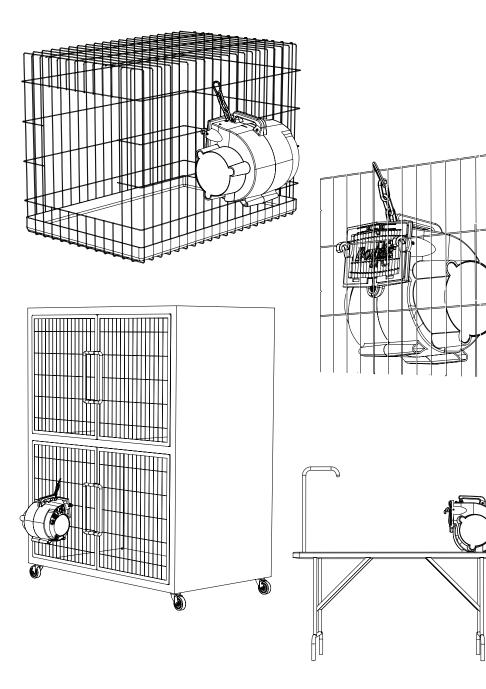

# Congratulations!

### Dear Challengair 560 Owner:

Congratulations on your purchase of the Challengair 560 Cage and Table Dryer, the most innovative and revolutionary animal dryer! The Challengair 560 will <u>monitor</u> <u>and control the air temperature in the animal's cage</u>. Let us take this opportunity to say we appreciate you, our customer, and if we may ever be of service, please feel free to contact us.

Please read this manual carefully and completely before beginning operation of your dryer and keep this manual in a convenient and safe place for future reference.

A warranty card is included with your dryer and should be filled out completely and mailed to **Double K Industries** within 30 days of the purchase date of your dryer to validate your warranty. Online registration available at <u>www.DoubleKIndustries.com</u>

### To Operate:

Fasten safety chain to cage front and place hooks over bars on cage door. (Safety chain should always be attached to cage front when dryer is hanging on a cage) Turn timer knob clockwise to desired drying time (ranges from 5 to 30 minutes). Dryer will turn off automatically after the set time expires. (The timer is for convenience only and the animal should not be left unattended during drying).

### To Regulate Air Volume:

Turn air control knob to desired setting.

### To Regulate Air Temperature:

**Low temperature:** Flip the top switch to the <u>ON</u> position marked <u>LOW</u> while the bottom switch is in the <u>OFF</u> position.

**Medium temperature:** Flip the bottom switch to the <u>ON</u> position marked <u>MEDIUM</u> while the top switch is in the <u>OFF</u> position.


High temperature: Flip both switches ON.

\*See page 7 for sample HEAT - AIR - TIMER configurations.

### Two Year Warranty:

**Guarantees:** The Challengair 560 is guaranteed against defects in materials and workmanship for two years from the original date of purchase. Should any component become inoperative due to defects in materials or workmanship for two years from the original date of purchase, Double K Industries will repair the dryer "FREE OF CHARGE" subject to the limitations below. For warranty service of your Challengair 560 Dryer, please ship prepaid to Double K Industries (address below) or call the location of the nearest authorized service center.

**Limitations:** Warranty does not cover shipping or transportation costs. Warranty applies to original purchaser only. Proof of purchase is required. Warranty does not cover filters. Warranty does not apply to motor if filters are not maintained or dryer is operated without filters in place. Warranty does not cover abuse, damage from improper or lack of maintenance, accidents, acts of war, acts of nature, droppage, improper voltage, disassembly or alteration. Disassembly, repair or service by anyone other than **Double K Industries** or a **Double K** authorized service center will void the warranty.

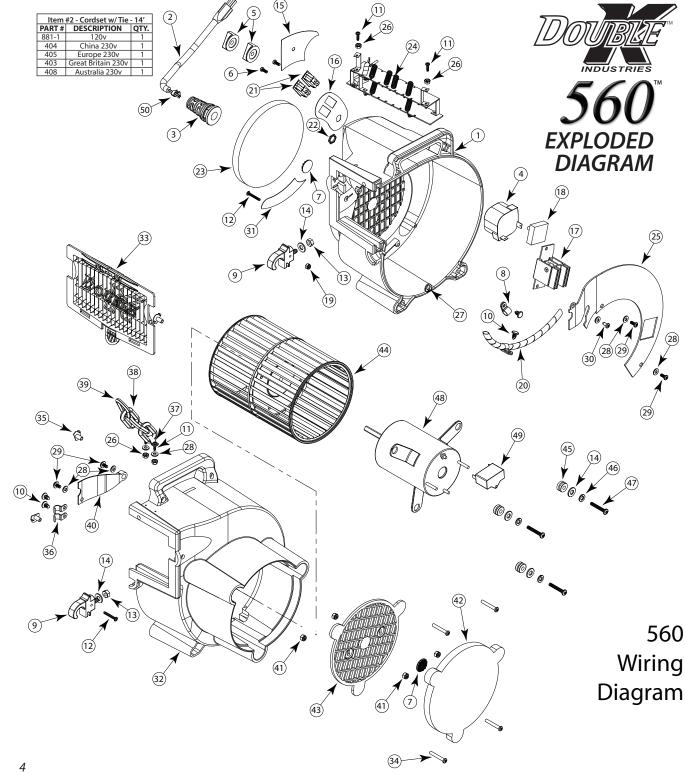

| ITEM #                     | PART #   | DESCRIPTION  | QTY.           |
|----------------------------|--|--|----------------|
| 1                          | 10065-ABS  | 560 Housing Instr. Side (Black)  | 1              |
| 3                          | 2038   | Strain Relief (14/3 cord)  | 1              |
| 4                          | 5558   | Switch Rotary Timer 30 Minutes   | 1              |
| 5                          | 5509   | Knob Switch Black  | 2              |
| 6                          | 5510   | Screw M4 x 10mm PHP  | 2              |
| 7                          | 5538   | Hook & Loop Disc for Filter Material   | 2              |
| 8                          | 5532   | Cable Clamp 3/8" Plastic   | 3              |
| 9                          | 10010  | Cage Hook Black 560-Dryer  | 2              |
| 10                         | 10020  | Clip, Christmas Tree Conical   | 4              |
| 11                         | 10019  | Screw #6-32 x 1/2 PHP  | 6              |
| 12                         | 10023  | Screw #6-32 x 1 PHP Black Oxide  | 2              |
| 13                         | 10026  | Nut 1/4-20 UNC Nylon Hex   | 2              |
| 14                         | 10031  | Washer 1/4 SAE Flat Platd.   | 3              |
| 15                         | 10032  | Label 3-color "Timer"  | 1              |
| 16                         | 10049  | Label 3-color "Heat/Air"   | 1              |
| 17                         | 10007  | Controller, 115V   | 1              |
|                            | 10006  | Controller, 230v   |                |
| 18                         | 10028  | Switch Rotary 2-Pos 13A  | 1              |
| 19                         | 10030  | Nut #6-32 UNF Lock Nylon Insert  | 2              |
| 20                         | 10041-8  | Wire Wrap Black 8" Long  | 1              |
| 21                         | 2148   | Switch Rocker 20A 125VAC 2-Pos.  | 2              |
| 22                         | 5513   | Nut, 15/32 x 32 UNF  | 1              |
| 23                         | 10005  | Filter Intake 5.8 Dia.   | 1              |
| 24                         | 10014-1  | Heating Element W/Connector 120V   | 1              |
| 24                         | 10025-1  | Heating Element W/Connector 230V   | I              |
| 25                         | 10012  | Modified Instrument Cover  | 1              |
| 26                         | 5533   | Nut #6-32 UNF Keps Locking   | 4              |
| 27                         | 10027  | Cabletie Loop .350 I.D.  | 1              |
| 28                         | 9028   | Washer #8 SAE Flat Plated  | 9              |
| 29                         | 10036  | Screw #8-32 x 3/8" PHP   | 4              |
| 30                         | 845  | Screw #8 x 3/8" Sht. Metal PHP   | 1              |
| 31                         | 10034  | Label 2-color "Model 560"  | 1              |
| 32                         | 10064-ABS  | 560 Housing Motor Side (Black)   | 1              |
| 33                         | 10102  | Exhaust Grill "Double K" Logo  | 1              |
| 34                         | 10102  | Screw #10-16 x 1-1/4 Hi/Low PHP  | 4              |
| 35                         | 10022-1  | 560 Modified Tee Nut   | 3              |
| 36                         | 5532-1   | Modified 560 Cable Clamp   | 2              |
|                            |  |  |                |
| 37                         | 10103  | Pipe Strap 3/8" 2-Hole   | 1              |
| 38                         | 10274  | Chain Links (No Ends)  | 3              |
| 39                         | 575  | Safety Hook, 2-3/8 x 1/4   | 1              |
| 40                         | 10015  | Cover - Motor Side Model 560   | 1              |
| 41<br>42                   | 10078  | Nut #8-32 UNF Hex Nylon Insert   | 4              |
|                            | 10004  | Filter Intake 560 Motor Side   | 1              |
| 43<br>44                   | 10003  | Grill Intake Motor Side<br>Fan 560-Blower (wheel) Q575-34  | 1              |
|                            | 10008  |  |                |
| 45                         | 10021  | Grommet, Rubber  | 3              |
| 46                         | 967  | Washer 1/4" Split Lock   | 3              |
| 47                         | 10024  | Screw #10-32 x 1-1/4 PHP   | 3              |
| 48                         | 10099  | Motor 115VAC, 60Hz, w/Capacitor  | 1              |
|                            | 10029  | Motor 230VAC, 50Hz, w/Capacitor  |                |
| 49                         | 10098  | 560 Motor Capacitor  | 1              |
| 50                         | 877  | Quick Tiewrap  | 1              |
| 51                         | 9015   | Terminal 1/4" Female clear blue 16-14ga (not shown)  | 3              |
| 52                         | 9015   | Terminal 1/4" Female clear yellow 12-10ga (not shown)  | 5              |
| 53                         | 5540   | Terminal 1/4" Female red 22-16ga (not shown)   | 5              |
|                            | #550   | 08-2 #9015 .#9015  |                |
|                            |  | #5540 #9015-3BLACK #9015<br>#6CK   |                |
|                            |  | Heater   | 1              |
| Heatin                     | g Element  |  |                |
| Heatin                     | g Element  | Timer Comm   |                |
| Heatin                     | g Element  | BLACK  | K WHI          |
| Heatin                     |  | BLACK<br>HITE  | K WHI          |
| Heatin                     |  | BLACK<br>HITE #5540 #2148 #9015 PLC Controller   | K WHI          |
|                            |  | BLACK<br>HITE #5540 #2148 #9015 PLC Controller   | K WHI          |
| #10002 #80                 | BL/<br>W   | BLACK<br>HITE<br>5540 #2148 #9015<br>Switch<br>BLACK   | K WHI          |
| #10002 #80                 | 000-2 #8000/#  | BLACK<br>HITE #5540 #2148 #9015<br>5540 Switch BLACK<br>BLACK<br>#3015-4   | K WHI          |
| #10002 #80                 | 000-2 #8000/#  | HITE #5540 #2148 #9015<br>5540 / #5541 #9015   | K WHI          |
| #10002 #80                 | <u>BL</u><br>W<br><u>000-2</u> #8000 / #<br>E<br>#5521-23<br>#55 | BLACK<br>HITE<br>5540<br>Switch<br>540 / #5541<br>HITE<br>#540 #2148<br>Switch<br>HITE<br>#9015<br>PLC Controller<br>#9015<br>HITE<br>PLC Controller<br>#9015<br>HITE<br>HITE<br>PLC Controller<br>#9015<br>HITE<br>HITE<br>HITE<br>HITE<br>HITE<br>HITE<br>HITE<br>HITE  | K WHI          |
| #10002 #80<br>WHIT         | <u>BL</u><br>W<br><u>000-2</u> #8000 / #<br>E<br>#5521-23<br>#55 | BLACK Timer Comm   HITE #5540 #2148 #9015 PLC Controlled   5540 #5541 #9015 #9015 #9015   540 / #5541 #9015-4 #9015-4 #9015-4   #5541 / #5540 #5535-23 BLACK #9015-4 #9015-4   | #901           |
| #10002 #80<br>WHIT         | BL<br>W<br>W<br>W<br>W<br>W<br>VN                                | BLACK<br>HITE<br>#5540<br>#5540<br>#5541<br>#5541<br>#5540<br>#5545<br>BLACK<br>#9015<br>BLACK<br>#9015<br>BLACK<br>#9015<br>BLACK<br>#9015<br>BLACK<br>#9015<br>BLACK<br>#9015<br>BLACK<br>#9015<br>BLACK<br>#9015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK<br>#015<br>BLACK | #5558          |
| #10002 #80<br>WHIT         | BL<br>WN<br>BROWN  | BLACK<br>HITE<br>#5540<br>#5540<br>#5541<br>#5540<br>#5541<br>#5540<br>#5541<br>#5540<br>#5541<br>#5540<br>#5541<br>#5540<br>#5541<br>#5540<br>#5541<br>#5540<br>#5540<br>#5541<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#5540<br>#56                                       | #901           |
| #10002 #80                 | BL<br>W<br>W<br>W<br>W<br>W<br>VN                                | BLACK Timer Comm   HITE #5540 #2148 #9015 PLC Controller   5540 #5541 #9015-4 #9015-4 #9015   #5541 #5540 #5535-23 BLACK 3 L BLACK #9015-4   #5541 #5540 #5540 #10028 #10028 1 1   | #5558<br>Timer |
| #10002 #80<br>WHIT<br>BROV | BL/WW/WW/W/W/W/W/W/W/W/W/W/W/W/W/W/W/W/W                         | BLACK Timer Comm   HITE #5540 #2148 #9015 PLC Controlled   5540 #5541 #9015 #9015 #015   540 / #5541 #9015-4 #9015-4 #9015   #5541 / #5540 #5535-23 BLACK 3 1 BLACK #9015-4   #5541 / #5540 #10040-23RED 2 1 #9015-4 1   #5528-23 GREEN #5537 Speed Control Switch #9015 #9015-4 1   | #5558<br>Timer |
| #10002 #80                 | 000-2 #8000 / #<br>#5521-23 #5:<br>MOTOF                         | BLACK Timer Comm   HITE #5540 #2148 #9015 PLC Controlled   5540 #switch #9015 #015 PLC Controlled   540 / #5541 #5535-23 BLACK 3 L #015 #015   #5541 / #5540 #10040-23RED 2 1 #015-4 #015 #015-4 #015   #5541 / #5540 #10040-23RED 2 1 #10028 #015-4 1 1   #5543 #5537 Speed Control Switch #9015 #9015-4 #9015 #9015-4 1  | #5558<br>Timer |
| #10002 #80<br>WHIT<br>BROV | BL/WW/WW/W/W/W/W/W/W/W/W/W/W/W/W/W/W/W/W                         | BLACK Timer Comm   HITE #5540 #2148 #9015 PLC Controlled   5540 #switch #9015 #015 PLC Controlled   540 / #5541 #5535-23 BLACK 3 L #015 #015   #5541 / #5540 #10040-23RED 2 1 #015-4 #015 #015-4 #015   #5541 / #5540 #10040-23RED 2 1 #10028 #015-4 1 1   #5543 #5537 Speed Control Switch #9015 #9015-4 #9015 #9015-4 1  | #5558<br>Timer |